

# MARION COUNTY SURVEYOR'S OFFICE

## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 22 TWN. 16<sub>N</sub> RNG. 5<sub>E</sub>


BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 9-30-09  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: Harrison  
Method of Establishment: County: 5-8-2000  
IN S.P.C. E Zone, NAD 83  
Name: 16052203  
N: 508 323.508 5(m)  
E: 75 476.868 8(m)



38th St	3800 N	E County Line 12000 E

38th St 3800 N

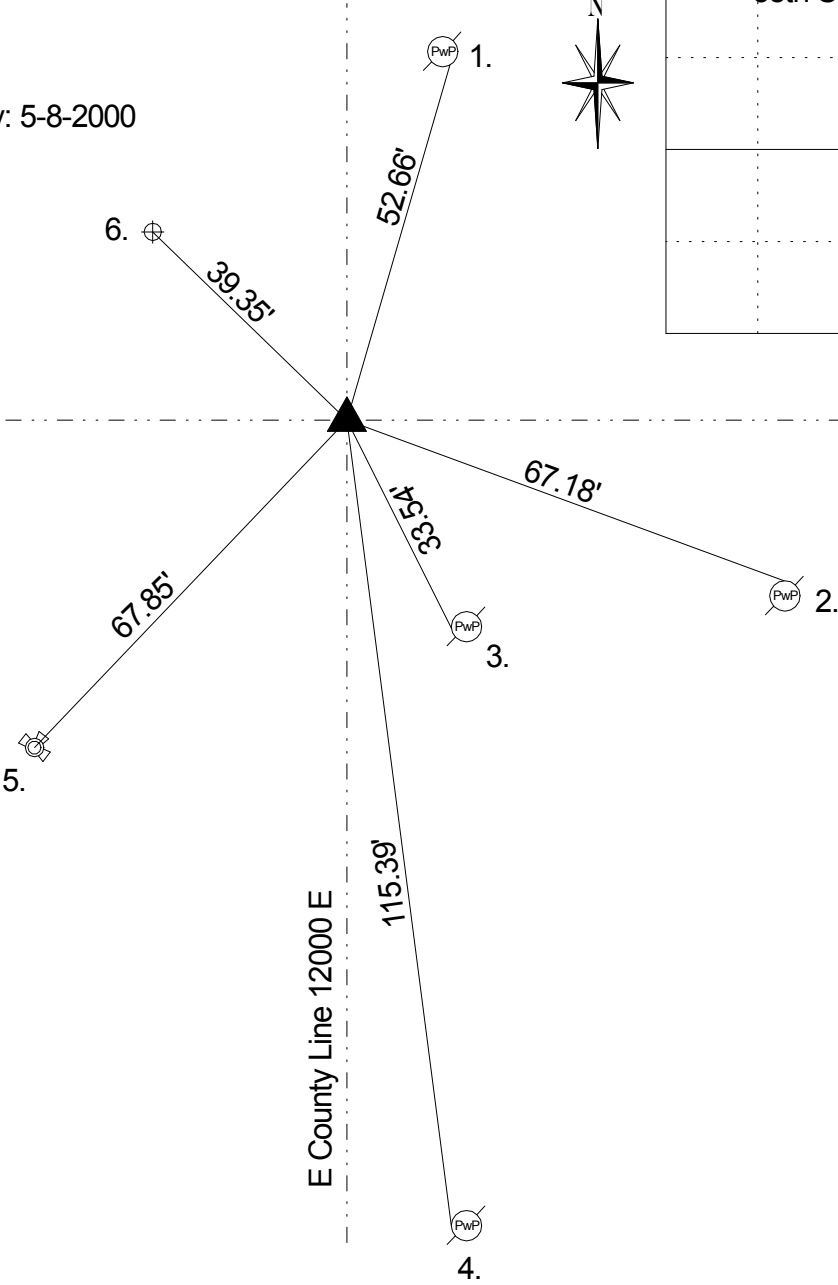

Original post set 1820 by Hendricks with witnesses: 12" sugar maple S 47 W 22 links; 11" beech N 76 E 15 links per Marion County Atlas p 15. Smith 4-12-1866 called stone as SE corner 15-16-5 per Lawrence Township Legal Survey Book. 8-20-1963 Burres called pipe over stone 3" down. 7-24-70 Day called stone 4" down. 5-26-72 SeFranka called stone 4" down. 9-19-73 Hancock Co Surveyor called brass plug and plate. 3-19-75 Fortner called PK nail over stone 4" down. 6-16-82 Cleveland called stone down 0.55'. Brass plug called in '73 was several inches north of the highest point on stone. Ties were pulled to highest point of stone. 6-25-87 Gries excavated and stone was found 6" down. Stone was moved to side and Harrison set in place of stone (stone still there but no longer in position). 6-9-1995 Wilcoxen retied. 5-8-2000 Wilcoxen retied. 2-13-06 Wilcoxen retied. 9-30-09 Wilcoxen reset Harrison due to repaving. New Harrison set on top of existing Harrison 15" down and retied.

REF.	DISTANCE	DESCRIPTION
1.	52.66'	Mag nail SE PwP #157-421 GA 20" up
2.	67.18'	PK nail N PwP #148-421 GB 20" up
3.	33.54'	Mag nail W PwP #7-421 20" up
4.	115.39'	Mag nail w/brass washer E PwP #6-421 12" up
5.	67.85'	Top nut of fire hydrant
6.	39.35'	Center USC&GS benchmark #Y237 Listed MCS Lawrence 73 Elev: 861.951 ft

--